


KY TYPE 152

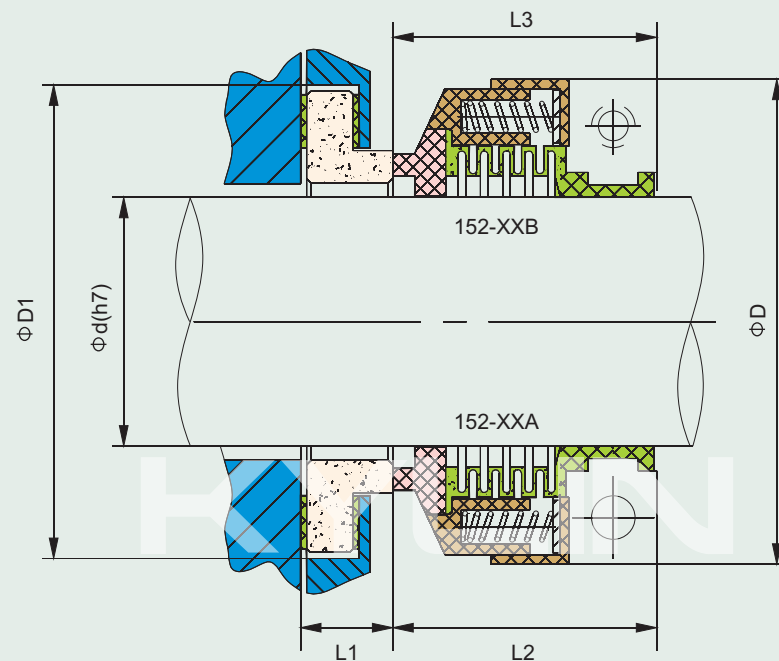

Part#	d	D	D1	L1	L2	L3
KY TYPE 152-25	25	60	48	13	42	45
KY TYPE 152-30	30	67	53	13	42	45
KY TYPE 152-35	35	72	58	13	42	45
KY TYPE 152-40	40	78	63	13	42	45
KY TYPE 152-45	45	84	68	16	44	46
KY TYPE 152-50	50	88	73	16	46	46
KY TYPE 152-55	55	95	78	16	46	46
KY TYPE 152-60	60	100	83	17	46	46
KY TYPE 152-65	65	105	88	17	46	46

**Teflon Bellow
Mechanical Seals**

Combined Materials

- Stationary Ring (Ceramic/SiC)
- Rotary Ring (Teflon/SiC)
- Secondary Seal (Teflon)
- Spring and Metal Part (Steel)

Working Conditions

- Mediums: Sulfuric acid, hydrochloric acid, phosphoric acid, acetic acid, and nitric acid with various degrees, etc.
- Temperature: $\leq 120^{\circ}\text{C}$
- Pressure: $\leq 0.5\text{MPa}$ Speed: $\leq 10\text{ m/Sec}$

▪ Add: A1001, Hebang Building, No.933 Tiantong North Road, Ningbo, China 315100

▪ Tel: +86-134-56162828

▪ Fax: +86-574-89069223

▪ Email: sales@kyltd.com