




**KY TYPE 202**

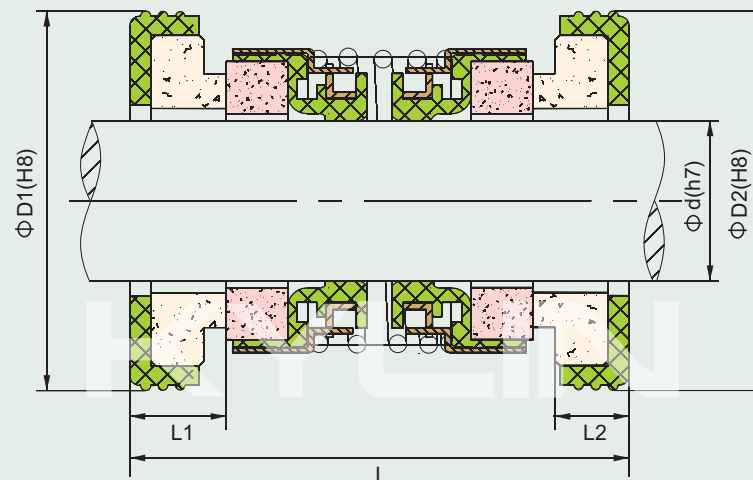

Part#	d	D1	D2	L	L1	L2
KY TYPE 202-14	14	26	26	38	7	7
KY TYPE 202-14A	14	28	28	38	7	7
KY TYPE 202-14B	14	30	30	38	7	7
KY TYPE 202-15	15	28	28	38	7	7
KY TYPE 202-15A	15	30	30	38	7	7
KY TYPE 202-16	16	28	28	38	7	7
KY TYPE 202-16A	16	30	30	38	7	7
KY TYPE 202-18	18	34	34	38	7	7
KY TYPE 202-20	20	36	36	40	7	7
KY TYPE 202-25	25	41	41	51	9	9
KY TYPE 202-30	30	46	46	51	9	9

## Double Mechanical Seals

### Combined Materials

- Stationary Ring (Carbon/SiC/TC)
- Rotary Ring (Ceramic/SiC/TC)
- Secondary Seal (NBR/EPDM/Viton)
- Spring and Punched Parts (Steel)

### Working Conditions

- Pumps: Submersible pumps, sewage pumps, etc.
- Temperature: -20°C~100°C
- Pressure:  $\leq 0.35\text{MPa}$
- Speed:  $\leq 6\text{ m/Sec}$

▪ Add: A1001, Hebang Building, No.933 Tiantong North Road, Ningbo, China 315100

▪ Tel: +86-134-56162828

▪ Fax: +86-574-89069223

▪ Email: sales@kyltd.com